





# HEELGUARD GRATING


Proudly Australian Made, Owned & Operated

## TECHNICAL PRODUCT INFORMATION CLICK DRAIN 300 GRATES

The original architectural stainless steel Heelguard with the added piece of mind of industry leading slip resistance. This innovative grating with a standard 5mm aperture also incorporates a fuss-free bolt-less “Friction Lock” system to secure the grating into place whilst allowing easy removal when required. Available in grade 304 or 316 with load classes from A-D as per AS3996.

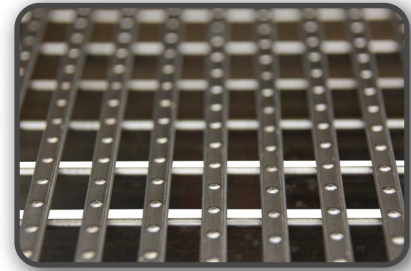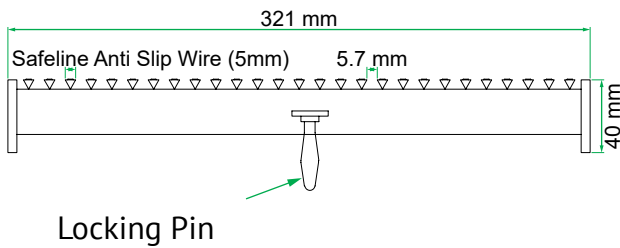

Safeline Anti Slip Wire (P4)

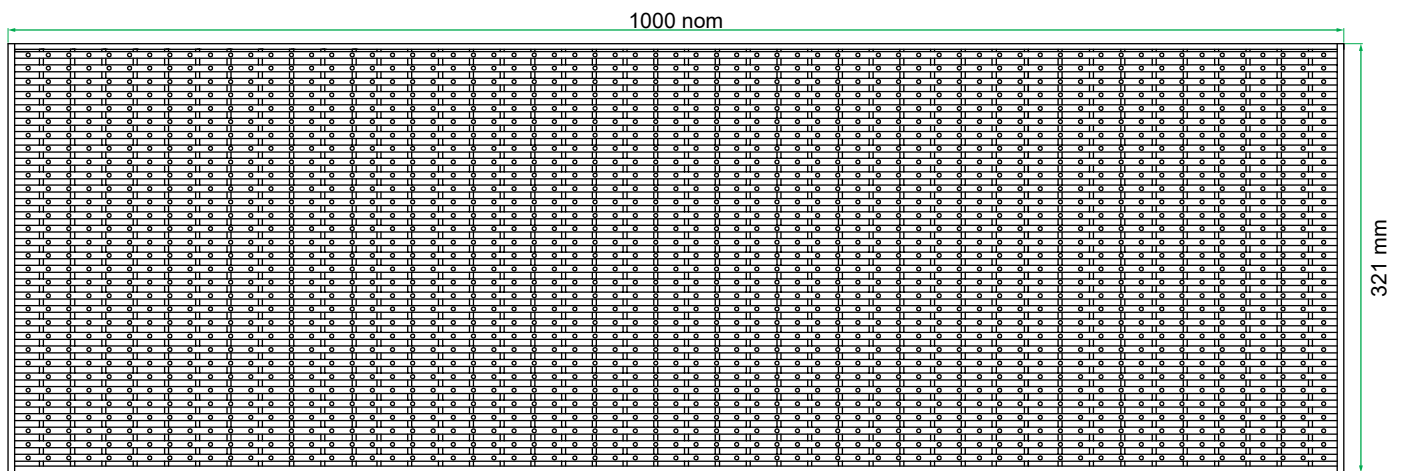

### SPECIFICATIONS

Load Class	Part Number	Material	Length (mm)	Load Class	Part Number	Material	Length (mm)
Class A - 10kN	HG3045A-300	304 SS	1000	Class A - 10kN	HG3165A-300	316 SS	1000
Class B - 80kN	HG3045B-300	304 SS	1000	Class B - 80kN	HG3165B-300	316 SS	1000
Class C - 150kN	HG3045C-300	304 SS	1000	Class C - 150kN	HG3165C-300	316 SS	1000
Class D - 240kN	HG3045D-300	304 SS	1000	Class D - 240kN	HG3165D-300	316 SS	1000

### CERTIFICATIONS

#### All Grating & Inserts:

- Bicycle tyre penetration resistance (AS3996 - Clause 3.3.6)
- Wheelchair and walking cane safety (AS1428.2 - Clause 9)
- Surface openings in pedestrian areas (AS3996)

#### Anti-Slip Grating:

- Wet Pendulum Test (AS4586:P4)
- Wet-Barefoot Inclining Platform Test (AS4586:C)
- Oil-Wet Inclining Platform test (AS4586:R11 - Parallel)
- Oil-Wet Inclining Platform Test (AS4586:R12 - Perpendicular)