

TECHNICAL PRODUCT INFORMATION

HEELGUARD GRATING™

Proudly Australian Made, Owned and Operated


IDEAL DRAIN

This original trough system will suit any application. Please note a pool or coastal installation will require grade 316 material and electropolished grates.


Manufactured from 304 grade stainless steel, also available in marine grade 316 on request Heelguard Grating offers both a standard and premium heelguard grate as well as tile insert options.



Ideal Drain with Heelguard

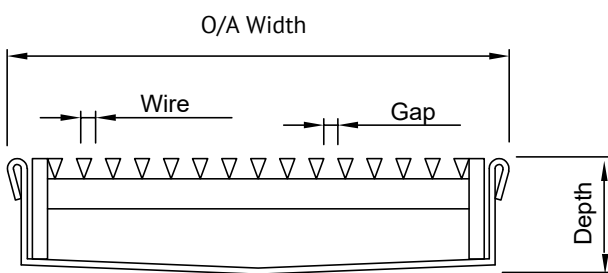


Ideal Drain with Tile Insert

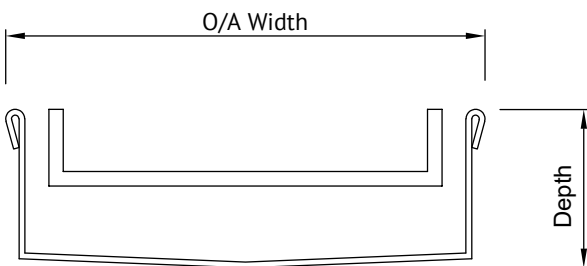

APPLICATIONS

Bathroom Drainage | Aged & Health Care Drainage
Balcony Drainage | Commercial Drainage Courtyard
& Al Fresco Drainage | Pool and Spa Area Drainage
Pedestrian Area Drainage | Shower Drainage Multi-
Residential Drainage | Threshold Drainage



GRATE & INSERT OPTIONS

- Econoline: 3mm wire with 5mm gap
- Fineline: 3mm wire with 3mm gap
- Uniline: 5mm wire with 5mm gap
- Broadline: 5mm wire with 3mm gap
- Safeline: 5mm wire with 5mm gap
- Tileline: 13mm-22mm internal insert depth
- Designer: Various slotted and punched designs

SPECIFICATIONS

Product Code: ID-50/80/100/130/150/CUS
Material: Grade 304 /316 (Required for pool applications)
Profile: U Shape
Grate Widths: 50, 80, 100, 130, 150, Custom
Grate Depth Options: 20/25/30/40
Length: Made to measure
Outlet Size: DN40, DN50, DN65, DN80, DN100

CERTIFICATIONS

All Grating & Inserts:

Bicycle tyre penetration resistance (AS3996-Clause 3.3.6)
Wheelchair and walking cane safety (AS1428.2- Clause 9)
Surface openings in pedestrian areas (AS3996)

Anti Slip Grating:

Wet Pendulum Test (Slip Resistant to AS4586)
Wet-Barefoot inclining platform test (AS4586:C)
Oil-Wet inclining platform test (AS4586: Parallel)
Oil-Wet inclining platform test (AS4586: Perpendicular)

www.heelguard.com.au | sales@heelguard.com.au

Heelguard Grating Australia Pty Ltd | ABN 89 122 572 141

5/12, Clarke Street, Sunshine VIC 3020 | PO Box 234, Melton VIC 3337 PH: (03) 9116 4969 | (0415) 500 485